

GATEMASTER

Bolt on Quick exit lock

Specification Sheet
No.173

- The quick exit push pad is designed to facilitate rapid exit through gates, a security shroud is also available to prevent access to the push pad from outside
- Stainless steel latchbolt which springs 22mm into the gate post.
- Supplied with bolt guide plate and gate post strike plate
- Latchbolt is adjustable in length for precise fitting on site
- Quick exit/key access or quick exit digital lock combinations available

C _ _ _ (Digital locks only)

Product Options

Two locks types available,

Key access on one side, push pad on the other

SBQEKLLO1	Left Hand for 10 - 30mm gate frames
SBQEKLRO1	Right Hand for 10 - 30mm gate frames
SBQEKLLO2	Left Hand for 40 - 60mm gate frames
SBQEKLRO2	Right Hand for 40 - 60mm gate frames

Digital keypad access on one side, push pad on the other

SBQEDGLO1	Left Hand for 10 - 30mm gate frames
SBQEDGRO1	Right Hand for 10 - 30mm gate frames
SBQEDGLO2	Left Hand for 40 - 60mm gate frames
SBQEDGRO2	Right Hand for 40 - 60mm gate frames

Installation

1. Drill 2 x 9mm dia. holes at 92mm centres for M8 fixing bolts
2. Drill 18mm clearance hole for latchbolt at 22mm centres down from the top 9mm hole
3. Fix lock in place using stainless steel clamp plate, bolt support plate and 2 stainless steel countersunk fixing bolts supplied. If the shroud is being used, assemble onto lock and bolt the lock onto the box section.
4. Drill clearance hole in gate post to receive the latchbolt. Slot this hole vertically to allow for gate sag
5. Ensure latchbolt moves freely without binding on gate or frame


Maintenance

Every 2 months - Lubricate latchbolt with light oil.
Annually - Dismantle lock and spray mechanism inside with light oil

Related Products



Bolt on quick exit shroud

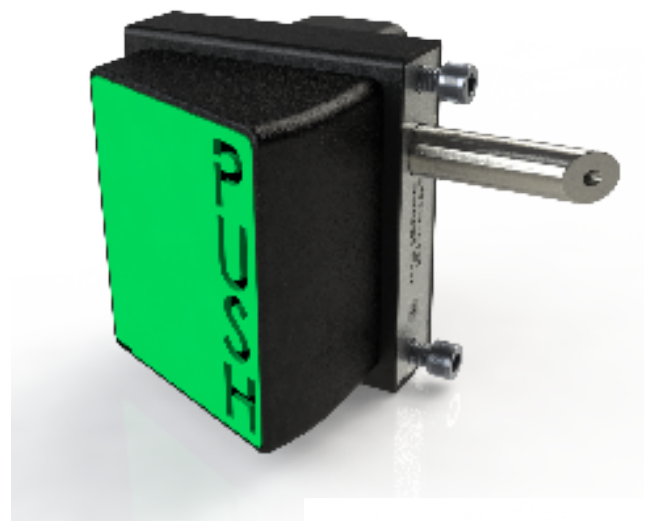

Right hand lock shown



Digital keypad access on one side



Key access on one side

